

SNO-WAY®
SNOW & ICE CONTROL EQUIPMENT

SKID STEER/TRACTOR



Move it

We live these words with every plow product that we design. So we design the products to just move more snow. Sno-Way understands the more productive you are, the more money you make. At Sno-Way, we just want you to ***Move it.***

**STRONGER
SMARTER
BETTER™**

THROUGH INNOVATION

HOME OF **INNOVATION™**

SNO-WAY® **29VHDSKD** *Move it.*

29VHDSKD Snow Plow Attachment

8'- 6" 29VHDSKD Steel Moldboard with Steel Cutting Edge

FEATURES


- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish
- » Double acting cylinders
- » Full hydraulic single switch actuation
- » Patented MaxADJUST™ Leveling System




Sno-Way's Patented MaxADJUST™ Leveling System




This easily accessible system allows the user to make adjustments while standing in front of the plow instead of from underneath.



Vee Position



Full-Width Straight Position



Angle Right Window Position

Move it
SNO-WAY

Visit snoway.com for video, updates and so much more.

SNO-WAY® 32Contractor

Move it.

32CSKD Snow Plow Attachment

8'6" • 9' • 10' 32CSKD Steel Moldboard with Steel Cutting Edge

SNOW MOVING CAPACITY

3.3
CUBIC YARDS
32C • 9'

3.4
CUBIC YARDS
32C WITH
3" E-Z SWITCH BOX WINGS AT 15°

3.9
CUBIC YARDS
32C AT 30° WITH
9" E-Z SWITCH WINGS

FEATURES

- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish
- » Optional Sno-Way E-Z Switch™ accessories for increased productivity



Shown with optional 9" E-Z Switch™ Wings and optional E-Z Fit™ Snow Deflector.



The built-in mounting system for the E-Z Switch™ Wing System allows you to add accessory wing options that can more than DOUBLE your snow moving capabilities. Image shows the mounting system and 9" wings on the 29HDSKD.



Angle Cylinder Crossover Relief Block

CONSIDER THE E-Z SWITCH™ WING SYSTEM FOR GREATER
EFFICIENCY AND SNOW
MOVING CAPACITY:



SNO-WAY

Move it
SNO-WAY


Visit snoway.com for video, updates and so much more.

SNO-WAY® *RevolutionHD* Move it.

REVHDSKD Snow Plow Attachment

10' REVHDSKD Steel Moldboard with Steel Cutting Edge

MAXIMUM SNOW MOVING CAPACITY

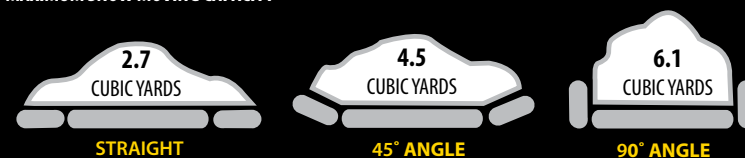


FEATURES


- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish
- » Full hydraulic single switch actuation




Shown with optional Blade Guides




Angle Right, Box Wing
Minimum Width 8'4"




Angle Right Box Wing
Width 8'

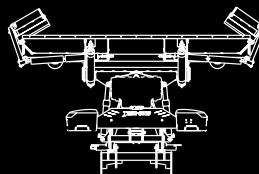


Transport Position




Box Wing Position



45° Scoop Position



Angle Right Wing Position



Full-Width Position

Move it
SNO-WAY

Visit snoway.com for video, updates and so much more.

29HDSKD

SNO-WAY® *Move it.*

Snow Plow Attachment

7'-6" 29HDSKD Steel Moldboard with Steel Cutting Edge • 8'-0" 29HDSKD Steel Moldboard with Steel Cutting Edge

SNOW MOVING CAPACITY

1.0
CUBIC YARDS
29HDSKD

2.7
CUBIC YARDS
29HDSKD WITH
3" BOX ENDS

3.3
CUBIC YARDS
29HDSKD WITH
9" E-Z SWITCH WINGS

FEATURES

- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish
- » Optional Sno-Way E-Z Switch™ accessories for increased productivity



CONSIDER THE E-Z SWITCH™ WING SYSTEM FOR GREATER EFFICIENCY AND SNOW MOVING CAPACITY:



The built-in mounting system for the E-Z Switch™ Wing System allows you to add accessory wing options that can more than DOUBLE your snow moving capabilities. Image shows the mounting system and 9" wings on the 29HDSKD.



29HDSKD Shown with Optional Sno-Way® E-Z Fit Straight Blade Poly Snow Deflector



Angle Cylinder Crossover Relief Block

29THDSKD

SNO-WAY® *Move it.*

Snow Plow Attachment

7'-6" 29THDSKD Steel Moldboard with Steel Cutting Edge • 8'-0" 29THDSKD Steel Moldboard with Steel Cutting Edge

FEATURES

- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish
- » High strength steel moldboard and Trip-Edge Technology ensures the base angle trips, not the entire blade

SNO-WAY® GROUND HUGGER™ BLADE DESIGN

Sno-Way's Ground Hugger™ blade design transfers pressure from snow loads to the blade - effectively forcing the blade downward.

- » Aggressive 65-degree cutting edge attack angle
- » Blade geometry creates optimal roll for maximum force on the ground and evenly distributes snow loads across the moldboard
- » Provides unmatched cleaning performance in combination with the downward force of the skid steer or tractor loader arms



Angle Cylinder Crossover Relief Block



Move it
SNO-WAY®

Visit snowway.com for video, updates and so much more.

29R

SNO-WAY® *Move it.*

Snow Plow Attachments

8' - 10" 29RSKD Steel Moldboard with Steel Cutting Edge

29R SNOW MOVING CAPACITY



29R SERIES



29R SERIES AT
45° ANGLE



29R SERIES AT
90° ANGLE


FEATURES

- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish
- » Full hydraulic single switch actuation




29RSKD Shown with optional Blade Guides


29RSKD




Angle Left Wing Position

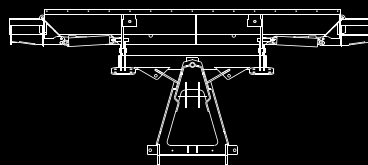


Maximum Width (8' 10")



Minimum Width with Angle (7 ft.)

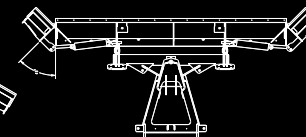

45° Scoop Position

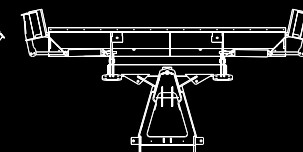

90° Box Wing Position



26R

SNO-WAY® *Move it.*

Snow Plow Attachments

8' 26RSKD Steel Moldboard with Steel Cutting Edge

26R SNOW MOVING CAPACITY




26RSKD Series is shown with the optional E-Z Fit Deflector




26RSKD Series


26RSKD




Angle Left Wing Position




Straight Position



Angle Right Wing Position



45° Scoop Position



90° Box Wing Position

Move it
SNO-WAY®

Visit snoway.com for video, updates and so much more.

SNO-WAY® **22 & 26** straight

Move it.

Snow Plow Attachments

Available in 6'-8" and 7'-6" – The 22-26SKD Straight Series Snow Plows provide efficient snow rolling and world-class durability.



22SKD Shown for Informational Purposes

FEATURES

- » Sno-Way SKD plows work with universal skid steer plate or tractor loader attachment plates
- » Angle cylinder crossover relief valves protect the blade when an object is struck (standard)
- » Integrated shoe receiver (shoes optional)
- » Patented Ground Hugger™ blade design
- » Plow uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)
- » Pre-drilled top rail holes for E-Z Fit™ Snow Deflector
- » Specially designed trip springs provide full load trip action for uninterrupted plowing
- » Stitch welded 12 gauge blade for superior rigidity and strength
- » Tight blade curl geometry provides optimum snow rolling action
- » Center A-frame float linkage to allow for contour changes
- » Triple-coat protection
 - Zinc phosphate wash
 - Automotive E-coat primer
 - Military grade powder coat finish



Shown
with 26SKD



Left, Straight or Right: Easily position your Sno-Way® SKD model straight plow into three main positions - or any position in-between - using the machine's auxiliary hydraulic controls.



A-Frame Float Linkage




Angle Cylinder Crossover Relief
Value Block



Full Load Trip Springs



22SKD

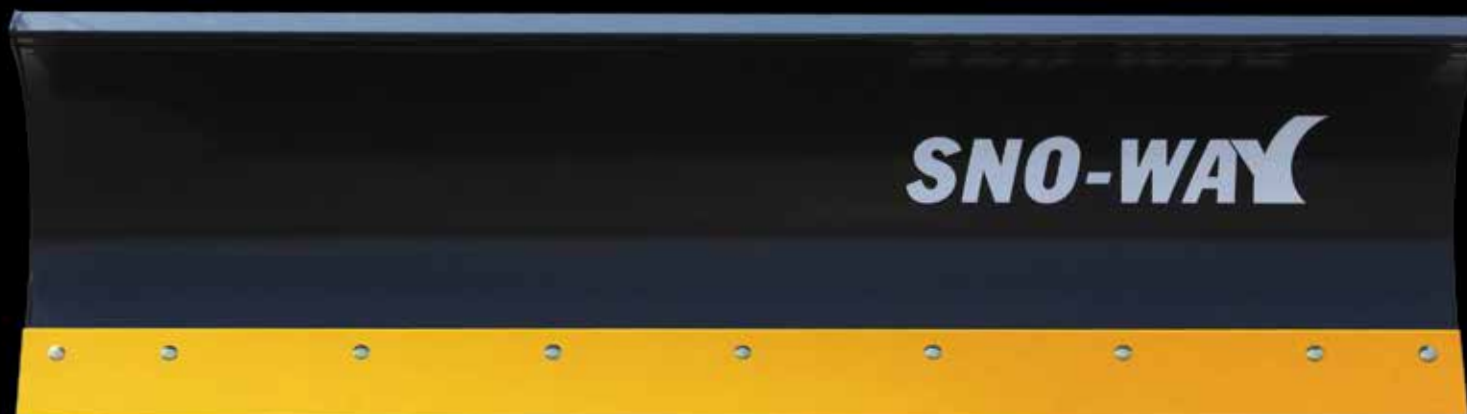

26SKD

Move it
SNO-WAY®

Visit snoway.com for video, updates and so much more.


Sno-Way® Move it. Skid Steer & Tractor Loader Salt Spreader

The Sno-Way® SKD10HS skid steer and tractor loader hydraulics salt spreader is the smart solution for fast, efficient deicing. The low profile design provides excellent visibility and is ideal for use in parking lots, loading docks, mall entrances and walkways.



FEATURES

- » Features a durable polyethylene hopper with super sidewall geometry for maximum salt flow to the spinner
- » Positive-close to full-open flow control gate can be adjusted to regulate spread material use
- » Adjustable stainless steel deflectors resist corrosion and direct salt from 4' to 30'
- » Powder coated steel frame provides rigid hopper support and is self standing for fast removal and easy storage
- » Universal skid steer and tractor attachment frame includes easy, drive-in connection and locking lever security points
- » Motor and spinner speed are controlled by a simple lever on the hydraulic flow control valve
- » Easy access hydraulic motor and flow control valve fitting provides quick service and maintenance
- » Spreader uses existing auxiliary skid steer hydraulics and quick coupler hose connections (not included)

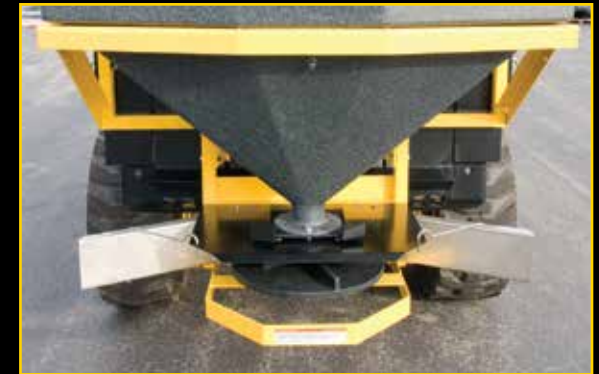

Adjustable Flow Gate: Located at the "throat" of the poly hopper, the flow gate (black slides) can quickly and easily be adjusted from a positive-close to full-open position. Either gate can independently be adjusted to regulate the amount of salt reaching the spinner.



Hydraulic Flow Valve



Universal Attachment
(Skid Steer or Tractor)



Exclusive Chunk Buster™ Design
Inside Hopper



SPREADER SPECIFICATIONS

| SKID STEER & TRACTOR LOADER SALT SPREADER | | |
|---|---------------|---|
| | SKD10HS | ADDITIONAL SPECIFICATIONS |
| Spreader Capacity | 10.25-CU.-Ft. | Flow Control Gate - Positive-Close to Full-Open |
| Spreader Width - Maximum* | 30 Feet | Stainless Steel Deflectors |
| Spreader Width - Minimum* | 4 Feet | Chunk Buster™ Salt Breakup System |
| Weight** | 300 lbs. | Easy Maintenance Belt Reduction Drive System |
| Height | 40" | UV Resistant Polyethylene Hopper |
| Width | 48" | Form Fitting Poly Lid with Retainer Strap |
| Depth | 26" | Powder Coated Steel Tube/Plate Frame Construction |
| Motor | Hydraulic | Spreader Control: Lever Action Hydraulic Flow Control Valve |
| Spinner (High Grade Polyethylene) | 16" Dia. | |

* WEATHER AND PAVEMENT CONDITIONS CAN EFFECT SPREAD WIDTH.

** EMPTY UNIT WEIGHT DOES NOT INCLUDE WEIGHT WITH DRY MATERIAL LOADED.



Flow Control Lever Operation

The lever on the hydraulic flow control valve regulates flow from the skid steer (or tractor) auxiliary hydraulics.



Spreader Leg Kit

Supports equipment in storage and makes mounting easy.

Move it
SNO-WAY®

Visit snoway.com for video, updates and so much more.


PLOW SPECIFICATIONS



| | 32CSKD | | | REVHDSKD | 29VHDSKD | 29RSKD | 26RSKD |
|------------------------------|---------------|---------------|---------------|--------------------------------|---------------|---------------|---------------|
| | 8'6" | 9'0" | 10'0" | 10'0" | 8'6" | 8'10" | 8'0" |
| Blade Width - Straight | 102" | 108" | 120" | 10'-0" (120") - Wings Straight | 102" | 106" | 96" |
| Blade Width - Vee | | | | | 95" | | |
| Blade Height | 32" | 32" | 32" | 29" | 29" | 29" | 26" |
| Plow Weight* - Steel | 752 lbs. | 762 lbs. | 845 lbs. | 999 lbs. | 975 lbs. | 839 lbs. | 724 lbs. |
| Plow Weight* - Polycarbonate | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Plow Shoes | Optional (2) | Optional (2) | Optional (2) | Optional (2) | Optional (4) | Optional (2) | Optional (2) |
| Urethane Trip Return | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ |
| Control Activation | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch |
| Plow Attachments | Universal | Universal | Universal | Universal | Universal | Universal | Universal |
| A-Frame Float Linkage | Standard | Standard | Standard | Standard | Standard | Standard | Standard |
| Hydraulic Hoses | 2 | 2 | 2 | 2 | 2 | 2 | 2 |

*COMPLETE PLOW WEIGHT (POUNDS) INCLUDES WEIGHT OF ATTACHMENT PLATE.

Move it
SNO-WAY®



| | 29THDSKD | | 29HDSKD | | 26SKD | | 22SKD | |
|------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | 8'0" | 7'6" | 8'0" | 7'6" | 7'6" | 6'8" | 7'6" | 6'8" |
| Blade Width - Straight | 96" | 90" | 96" | 90" | 90" | 80" | 90" | 80" |
| Blade Width - Vee | | | | | | | | |
| Blade Height | 29" | 32" | 29" | 29" | 26" | 26" | 22" | 22" |
| Plow Weight* - Steel | 775 lbs. | 700 lbs. | 700 lbs. | 639 lbs. | 605 lbs. | 540 lbs. | N/A | N/A |
| Plow Weight* - Polycarbonate | N/A | N/A | N/A | N/A | N/A | N/A | 344 lbs. | 334 lbs. |
| Plow Shoes | Optional (4) | Optional (2) | Optional (2) | Optional (2) | Optional (2) | Optional (2) | Optional (2) | Optional (2) |
| Urethane Trip Return | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ | Shock Killer™ |
| Control Activation | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch | Single Switch |
| Plow Attachments | Universal | Universal | Universal | Universal | Universal | Universal | Universal | Universal |
| A-Frame Float Linkage | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard |
| Hydraulic Hoses | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |

*COMPLETE PLOW WEIGHT (POUNDS) INCLUDES WEIGHT OF ATTACHMENT PLATE.

| WHAT PLOW FITS MY SKIDSTEER? | | | | | | | | | |
|------------------------------|-------|-------|--------|---------|----------|--------|----------|----------|--------|
| HORSEPOWER | 22SKD | 26SKD | 26RSKD | 29HDSKD | 29THDSKD | 29RSKD | 29VHDSKD | REVHDSKD | 32CSKD |
| 20 | X | | | | | | | | |
| 30 | X | | | | | | | | |
| 40 | | X | X | | | | | | |
| 50 | | X | X | X | X | X | X | | |
| 60 | | X | X | X | X | X | X | | |
| 70 | | | | X | X | X | X | X | X |
| 80 | | | | X | X | X | X | X | X |
| 90 | | | | X | X | X | X | X | X |
| 100 | | | | X | X | X | X | X | X |



ACCESSORIES designed to fit your plow.

Engineered by Sno-Way for maximum performance and perfect fit, factory-original Sno-Way parts and accessories put your plow into productivity overdrive. All Sno-Way parts and accessories include a one-year limited warranty when installed by an authorized Sno-Way Retailer.

PLOW BLADE GUIDES

Bright colors for high visibility in inclement weather, Sno-Way's flexible blade guides help identify the plowing width of your blade while plowing. Constructed with a braided cable core, these durable guides will flex under the most demanding plowing conditions. Each guide measures ½" diameter x 26" long and includes four 5/16"-18" x 1" hex head cap screws, washers and nylon insert lock nuts.



SNO-WAY® E-Z FIT SNOW DEFLECTORS

Sno-Way's E-Z Fit snow deflector design includes enhanced curvature for optimum snow-rolling and deflection. The 3-piece design is constructed of High Molecular Weight Polyethylene (HMPE), a super-slick material with excellent impact resistance in cold temperatures. Sno-Way's unique, molded reinforcement rib design provides superb rigidity and allows each deflector to overlap one another. The deflector will install on all Sno-Way straight blade widths from 6 feet to 10 feet and the 29VHDSKD. Each deflector includes the stainless steel mount hardware.



HIGH-PERFORMANCE SNOW PLOW HYDRAULIC OIL (QUART ONLY)

Sno-Way's high-performance, zinc-free hydraulic oil provides superior corrosion resistance and maintains a pour point of -60°F. Sno-Way hydraulic oil will not foam or gel in extreme cold weather conditions. Recommended for all Sno-Way truck-mounted snow plows.



3/8" STEEL CUTTING EDGE (22 SERIES)

Sno-Way offers a 3/8"-thick heavy-duty steel cutting edge for use on 22 Series 80" and 90" snow plows. The 3/8" design provides increased cutting edge durability and longer wear life than the standard 1/4" steel edge.



SNOW PLOW EMERGENCY PARTS KITS

Sno-Way's emergency parts kits keep your rig stocked with the most common field service parts in the event of an untimely part replacement or plow repair. All parts are packaged in a durable plastic case (13.5" x 11" x 3.25")



HIGH PERFORMANCE TOUCH-UP SPRAY PAINT

Sno-Way touch-up paint is custom matched to help conceal chips and scrapes and to protect your original Sno-Way equipment from corrosion. All colors are available in 12-ounce aerosol cans.



3/4" POLY CUTTING EDGE (22 SERIES)

Sno-Way's 22 Series cutting edges are 3/4" thick and are made of UHMW polyethylene. These durable cutting edges are ideal for snow removal on decorative surfaces, paving stones, cement driveways or any easily scratched surface material.



PLOW SHOE KITS

These optional cast-iron disc shoes help extend the wear life of the plow cutting edge. Each shoe includes a spacer and multiple washers for simple adjustment. The shoes are easily secured to (and removed from) the plow with locking lynch pins.



ANTI-CORROSION COMPOUND

Sno-Way's non-conductive compound effectively seals against dirt and moisture and provides maximum protection to electrical switches and contacts. Sno-Way recommends liberal compound application to all exposed electrical components for extended wear life.



STEEL CURB GUARD

Sno-Way's steel curb guards are 1/2" thick and measure 15.5" x 6" in size. Each guard features multiple hole patterns to match different Sno-Way cutting edge bolt hole locations. Both guards quickly and easily install in front of the plow cutting edge and ship with complete mount hardware.



E-Z SWITCH™ WING SYSTEM

Sno-Way offers the E-Z Switch™ 3" Box Wing and 9" Scoop Wings sold in sets of two. Add these to your 32CSKD 8'6"/9'0" or 29HDSKD for added snow moving capabilities.




The E-Z Switch™
3" Box Wing



The E-Z Switch™
9" Scoop Wing

SNO-WAY® E-Z FIT POLY BLADE KIT

Sno-Way offers a poly skin insert for use on the RevolutionHDSKD, 29HDSKD, 29RSKD, 26RSKD and 26SKD series plows. You no longer need to have a special blade to have the benefit of a poly blade. You can place the E-Z Fit Skin Insert on your current blade and you have a new poly blade, ready for the snow to slide off. The kit consists of retainer brackets, poly skin with decal and all necessary hardware.

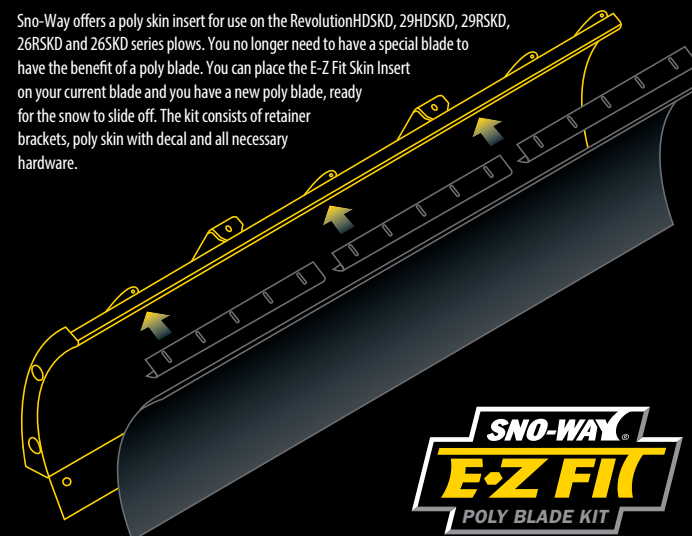

Move it
SNO-WAY®

Visit snowway.com for video, updates and so much more.



www.snoway.com

See how SNO-WAY® continues to lead Innovation.
More info, watch videos, find a dealer, contact us.



SNO-WAY®
SNOW & ICE CONTROL EQUIPMENT
www.snoway.com

SOLD AND SERVICED BY:

STANDARD LIMITED WARRANTIES

For complete warranty terms for products sold by Sno-Way, please refer to the limited warranty information that accompanies each product, visit www.snoway.com or contact your authorized Sno-Way Retailer.

LEGAL STATEMENT VEHICLES INTENDED TO BE EQUIPPED WITH A SNOW PLOW AND/OR SPREADER MUST BE IN COMPLIANCE WITH THE VEHICLE MANUFACTURERS' SPECIFICATIONS FOR EQUIPMENT APPLICATION. SNO-WAY INTERNATIONAL, INC. RESERVES THE RIGHT TO CHANGE PRODUCT DESIGN, CONSTRUCTION, MATERIALS AND SPECIFICATIONS WITHOUT NOTICE UNDER ITS ONGOING PRODUCT IMPROVEMENT PROGRAMS.

Sno-Way Snow and Ice Control Equipment are protected by numerous U.S. and foreign patents with other patents pending. All other trademarks and registered trademarks are the property of their respective owners.
© 2018 Sno-Way International, Inc. All rights reserved. Litho in USA. 05-18
P/N 97101561