# **SERIES 2**


Fits 3/4 Ton to Class 5

You MUST see your retailer or check online application guide for current truck application information

The 29VHD Series flared wing V-Plow, available in powder coated steel or with a stainless steel skin, has our patented Ground Hugger™ blade design along with the MaxADJUST™ Leveling System



design along with the MaxADJUST™ Leveling System to keep the plow on the ground with optimal alignment that eliminates snow trails.

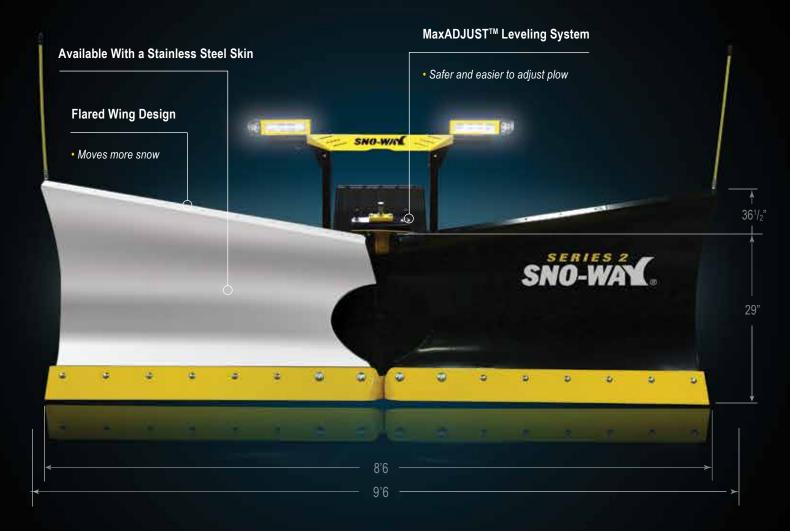

### MAXIMIUM SNOW MOVING CAPACITY



29VHD at 15° on 9'6 Model



29VHD at 30° on 9'6 Model

### DOWNPRESSURE® STANDARD





BLADE GROUNDED WHEN BACKDRAGGING Stainless Steel
Skin Kit

Looking for stainless steel for your 29VHD?

Purchase the Stainless

Steel Skin Kit. Inserts easily over your powder coated steel skin for an eye catching look. (Includes decal and hardware.)

## **FEATURES**

## **29VHD SERIES 2 SPECS**



Sno-Way's Patented MaxADJUST™
Leveling System allows the user to
make adjustments while standing
in front of the plow instead of from
underneath. The operator can
adjust the center hinge for perfect
plowing alignment and eliminate a


snow trail. This system allows for easy use on fleets that use more than one type of truck model because there is no plow frame disassembly necessary for proper fit to each truck.

### Series 2 Package

- LED Thermosensitive heated Lights
- ProControl™ 2 Plus (controls plow & lights)
- Upgraded Hydraulics Package
- · Outboard Mount Stand
- Complete Fleet 2-Plug Connection System
- ESS® Energy Smart System
- Patented MaxADJUST™ Leveling System
- Patented Ground Hugger™ Blade Design
- Pre-Drilled Top Blade Rail
- Patented Shock Killer™ Trip Return System
- Available with Stainless Steel Skin

** Option Up With Smart Sight®
and Smart Flash® **

Blade Width	8'6"	9'6"	
30° Plowing Width	78"	83"	
Scoop Width	88"	98"	
Blade Height (Center/Outer)	29"/361/2"	29"/38"	
Blade Thickness	12 Gauge	12 Gauge	
Cutting Edge	. 1/2" x 6"	1/2" x 6"	
Vertical Ribs	6	6	
Trip Springs: Extension	2	2	
Plow Shoes	. Optional	Optional	
LED Lights Thermosensitive Heated	Standard	Standard	
Energy Smart System (ESS®) Technology	. Standard	Standard	
Drive-in Mount	Standard	Standard	
Paint: Triple Coat Protection	Standard	Standard	
Shock Killer™ System	Standard	Standard	
FlexForce Frame	Standard	Standard	
DownPressure® Hydraulic System	Standard	Standard	
Wireless ProControl™ 2 Plus OptionalOptional			
Weight	. 840 lbs.*	905 lbs.*	
Stainless Steel Weight	. 897 lbs.*	981 lbs.*	
* Plow weight does not include			



weight of vehicle mount



